

## How to update Provok3ds Nozzle ADXL v1.3


- 1) hook up the nozzle adxl via a usb-c cable to the SBC
- 2) ssh into your SBC
- 3) git clone [https://github.com/mattthebaker/ampon\\_anchor.git](https://github.com/mattthebaker/ampon_anchor.git)
- 4) cd ampon\_anchor
- 5) git checkout ampon\_f042
- 6) cd
- 7) ./ampon\_anchor/update.sh
- 8) Profit
- 9) If you get No device found

```
root@fluiddd:~# ./ampon_anchor/update.sh  
No device found in boot mode
```

- 10) Unplug cable from the Nozzle ADXL
- 11) Jump the dfu holes----->
- 12) Plug Nozzle ADXL back in
- 13) Repeat step 7



Board in DFU mode waiting to be Flashed

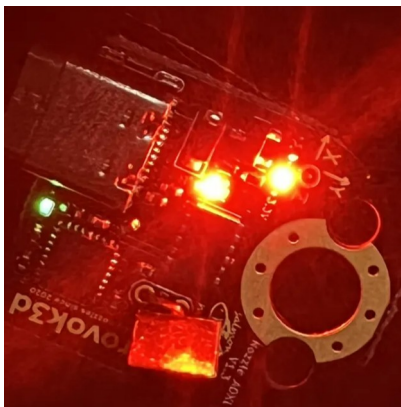

Board Flashed

